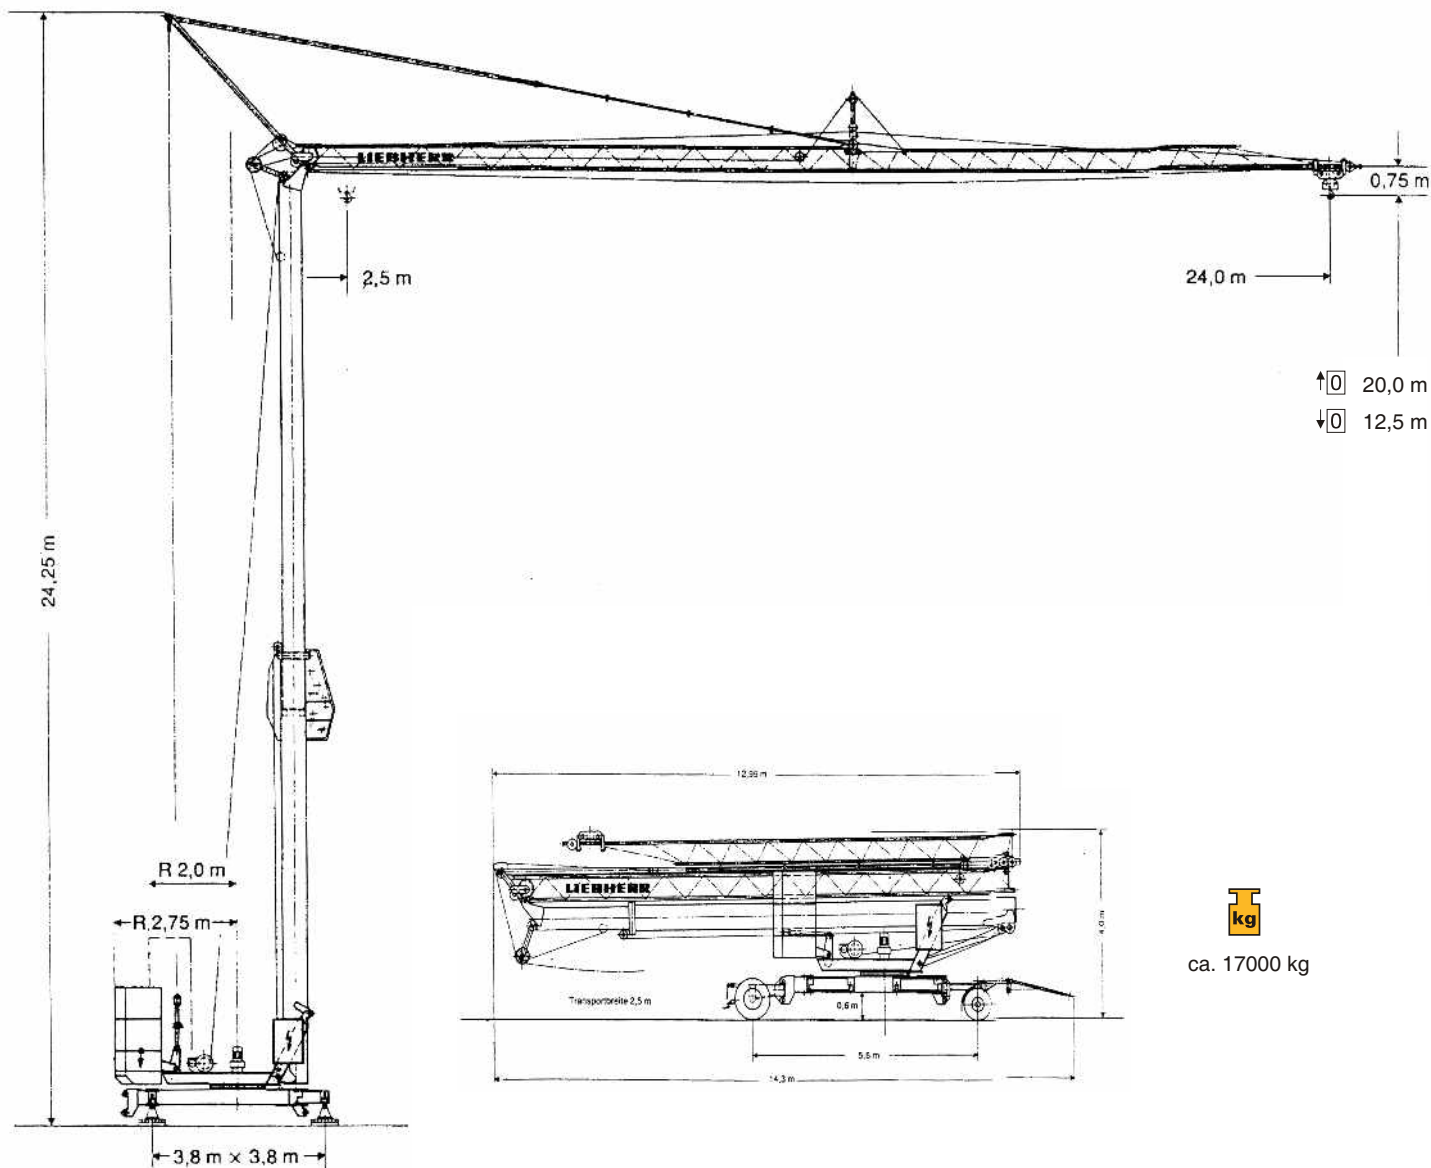


VĚŽOVÝ JEŘÁB

samostavitelný



20 K



↑ 0 20,0 m
↓ 0 12,5 m




ca. 17000 kg

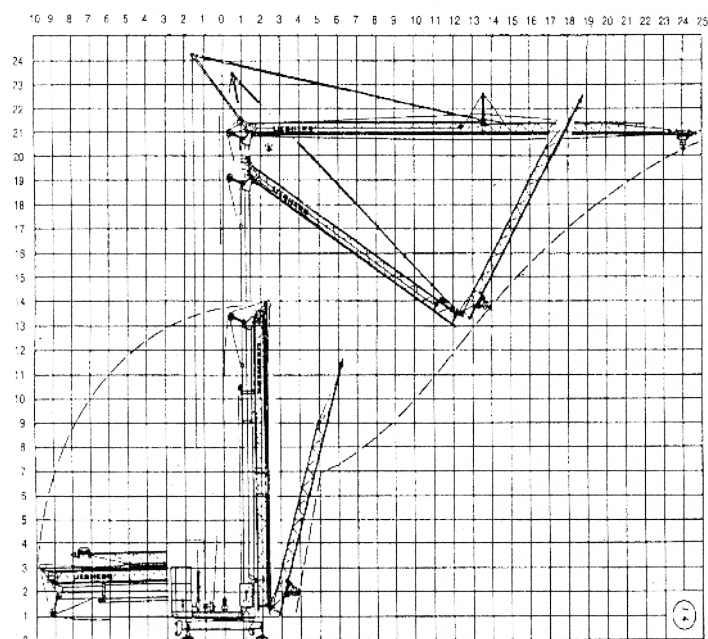
	protizát ž		váha konstrukce
	r = 2,75 m 8500 kg r = 2,25 m 10000 kg		8400 kg

LIEBHERR




VYLOŽENÍ A NOSNOST


Vyložení m	 m/kg	Nosnost														
		10,0	11,0	12,0	13,0	14,0	15,0	16,0	17,0	18,0	19,0	20,0	21,0	22,0	23,0	24,0
24,0	2,5 – 11,7 2000	2000	2000	1945	1765	1615	1490	1380	1280	1195	1125	1055	995	945	895	850


MONTÁŽNÍ SCHÉMA



PŘÍKONY A RYCHLOST EL. MOTORŮ

	rychlost	spot eba
	U/min. 0 ↔ 0,9 sl./min tr./min	1,5 kW
	30,0 / 30,0 m/min	1,1 / 3,0 kW
	25,0 m/min	2 x 1,0 kW

	rychlost	kg	m/min
11,0 kW 	1	2000	5,0
	2	2000	20,0
	3	1300	40,0

 p ívodní kabel	jisti
28 m / 4x10 mm ² / 380 V	20 kVA